

CloudsignLED

***A freestanding
portable
linkable
networkable
bright
gorgeous
easy-to-use
LED display
controlled by
your phone
or tablet***

***Only from
Aurora LED Systems***



This all-in-one, full color 3.0 mm pitch LED video display comes with a built in media player, 32GB of storage, included WiFi and networking, and a free, user-friendly control app.

It's brighter than TV's, has color accuracy and richness like top-end OLED displays, and has no reflective surface to get in the way of people seeing your images & video.

Just roll this lightweight display to where you need it and plug it into a standard electrical outlet. Then turn it on and let it run. No other player needed. It's perfect for retail and institutional applications yet designed sturdily enough for professional use from trade shows to a mobile large LED screen when multiple units are connected together.

When it's time to change content, sync your mobile device to the CloudsignLED via WiFi and upload or download your content and set up your playlists.

Multiple versions are available including the streamlined double-sided Dual and the larger format Plus.

The lightweight design allows for easy movement on the integrated wheeled stand.

AURORA
LED SYSTEMS





CLOUDSIGNLED SPECIFICATIONS (STANDARD VERSION)

Pixel Pitch (mm)	3.0 mm
LED Type	SMD (gold-alloy-wirebonded)
Pixel Density (per panel)	122,880
Viewing Angle (H/V)	160 degree / 160 degree
Brightness (Nits)	>1000
Refresh Rate	>1920HZ.
Optimal viewing distance	10' to 40'
Input voltage	110 to 240 volts (auto adjusting)
Max Power usage	< 1000W
Display size in pixels	640V x 192H
Display size	75 3/4"H x 22 13/16"W x 2 3/4"D (without stand) 80 3/16"H x 22 13/16"W x 20"D (on stand)
Display weight	56 lbs w/out stand 64.1 lbs with stand
Input interface	WiFi / Ethernet (standard) USB (custom)
Control App:	LEDAD (free)
Autolinking:	Standard
External video input:	Optional
Still Images	JPEG, PNG
Video Content	MP4



Easy access ports include LAN connection for easy networking, OUT & IN ports for daisy-chaining multiple CloudsignLED's together, and optionally activated USB port. In standard single-sign operation, a single jumper connects Unit 1 to IN. In passive operation (like from an external processor or in SlimSignLED), the device receives its input from the IN port.

A convenient external WiFi antenna aids in strong and rapid communications from your phone or tablet to the CloudsignLED. Nestled on the side of the power supply housing, it is also protected from damage during shipment. The red glowing power button is easy to reach even when wall-mounted. The 3.5 mm stereo audio out jack allows video & audio content.

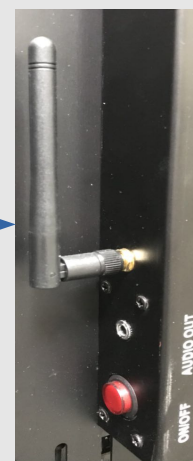

Also available:

- **CloudsignLED Plus:** Same functionality but larger size.
- **CloudsignLED Dual:** Same functionality but integrated 2-sided display
- **SlimsignLED:** Identical exterior but passive version for driving by external processor/media device when built-in control is not needed
- **Road/flight ATA case:** Holds up to 6 CloudsignLED's / SlimsignLED's

