


Product Information

3.9 mm LED Video Panel

Outdoor+Indoor Series

GLE-0390W/OB T or S

IP65 Rated Panel*

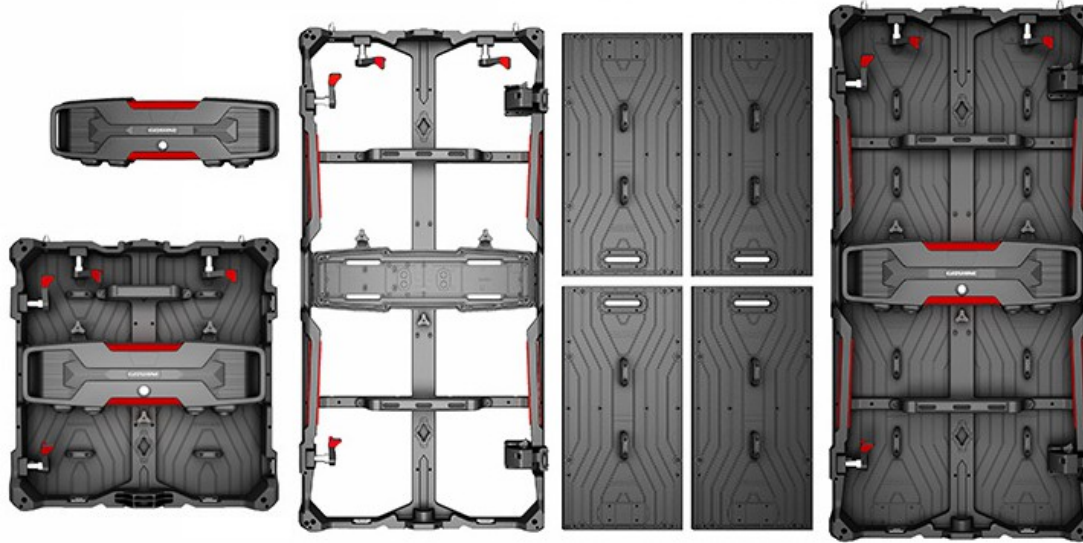

Specifications

Display

	TALL	SQUARE
Pixel Pitch	3.91	
LED Type	SMD	
LED Covering	WHT STD; BLK OPTIONAL	
LED Configuration	3-in-1	
LED Bonding Type	Gold	
Brightness (Nits)	3500-4000 STD; 2000-2500 or 5000+ Nits OPT	
Pixel Count	128 x 256	128 x 128
Pixel Density / Sq M	65,536	
Frame Rate	60 Hz	
Refresh Rate	>1920 Hz STD, >3840 OPT	
Scan	1/16	
Gray Scale	16 Bit	
Horizontal Viewing Angle	160 degrees	
Vertical Viewing Angle	140 degrees	
Color Temp Range	6500-9000K	

Chassis / Exterior

	TALL		SQUARE	
Width	500 mm	19.69 in	500 mm	19.69 in
Height	1000 mm	39.37 in	500 mm	19.69 in
Depth	86 mm	3.39 in	86 mm	3.39 in
Weight	12.9 kg	28.4 lb EST	8.8 kg	19.4 lb EST
Material	Magnesium alloy		Magnesium alloy	
Max Stack/Hang	12T		20SQ	

Power

Input voltage	220V/110V			
Average Pwr	200W/panel	400W/sq m	100W/panel	400W/sq m
Max Pwr	400W/panel	800W/sq m	200W/panel	800W/sq m
Input Current	4A @ 110V			
Panels/Circuit	5T@120V/20A	10T@208V/20A	10S@110V/20A	20S@208V/20A

Connectors

Power	Seetronic	PowerKon	IP65	
Signal	Seetronic	EtherKon	IP54 or IP65	(optional)