


Product Information

2.60 mm LED Video Panel

Indoor Series – Built-In Curving

GMV-0261B

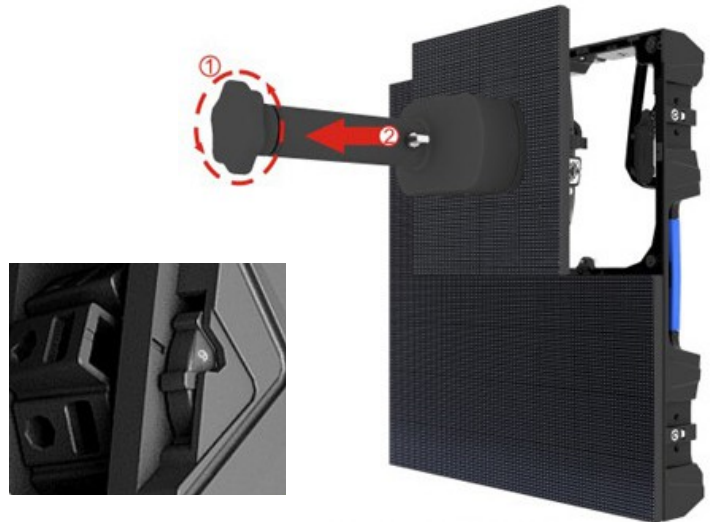

Dial-in curvature lock – up to 6 degrees per panel

IP30

Specifications

Display

Pixel Pitch	2.6	
LED Type	SMD 1515	[gold conn.]
LED Configuration	3-in-1	
Brightness (cd/sq m)	>1000	
Pixel Count	192 x 192	
Pixel Density / Sq M	147,456	
Frame Rate	60 Hz	
Refresh Rate	3840Hz	(adjustable)
Scan Rate	1/16	
Gray Scale	16 Bit	
Horizontal Viewing Angle	160 degrees	
Vertical Viewing Angle	140 degrees	
Est life to ½ brightness	50,000	hrs
Est MTBF	10,000	hrs
Color Temp Range	6500-9500K	

Chassis / Exterior

Width	500 mm	19.69 in	
Height	500 mm	19.69 in	
Depth	88 mm	3.46 in	
Weight	8.3 kg	18.3 lbs	EST
Material	Die-cast aluminum		
Load Cap.	200 kg	440 lb	

Power

Input voltage	220V/110V	
Average Pwr	82W/panel	325W/sq m
Max Pwr	163W/panel	650W/sq m
Input Current	AC 1.4A	