

**Product Information**


**4.8 mm LED Video Dance Floor Panel**

**Outdoor+Indoor Series**

**GMX-0480W**

**STOCK SERIES**

**IP65 Rated**

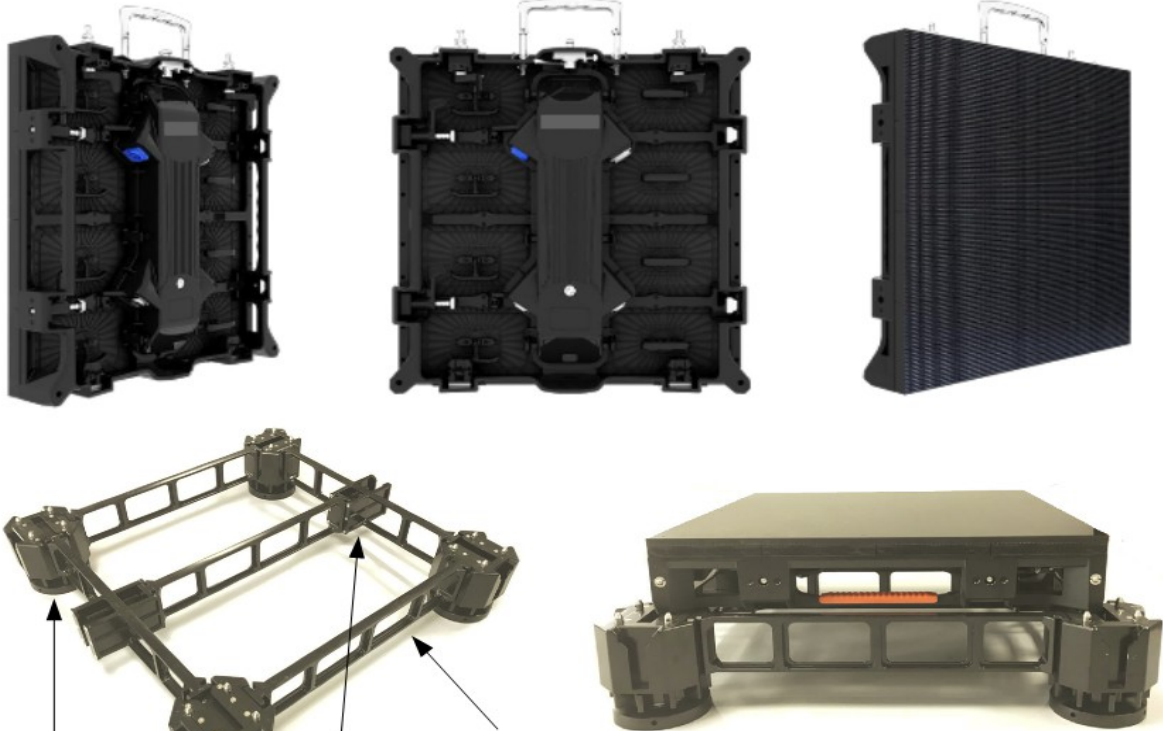

**G-FL-TWR**  
Required support tower which is placed at each panel corner

**G-FL-T-Arm**  
Optional version of support rod which allows an extra support rod in the center for heavy load support

**G-FL-I-Arm**  
Connecting support rod which must be used to connect each tower

**Specifications**

**Display**

**4.8 mm**

Pixel Pitch	4.81
LED Type	SMD
LED Configuration	3-in-1
Brightness (Nits)	4500
<i>If smoked acrylic cover is applied, maximum brightness lowers</i>	
Pixel Count	104 x 104
Pixel Density / Sq M	43264
Frame Rate	60 Hz
Refresh Rate	> 1000 Hz
Scan	1/8
Gray Scale	16 Bit
Horizontal Viewing Angle	140
Vertical Viewing Angle	140
Color Temp Range	6500-9500K

**Chassis / Exterior**

Width	500 mm	19.69 in
Height	500 mm	19.69 in
Depth	75 mm	2.95 in
Weight	9 kg	19.8 lbs

Material: Die cast aluminum alloy

**Power**

Input voltage	220V/110V
Average Pwr	145W/panel    580W/sq m
Max Pwr	290W/panel    1160W/sq m
Input Current	2.5A            est