




Specification Information for Flexible DF-IB Module Kits Including 1.923, 2.5, 3.125, 4.166, 6.25 mm

Pixel Pitch	1.923 mm	2.500 mm	3.125 mm	4.166 mm	6.250 mm
Horizontal Resolution	208	160	128	96	64
Vertical Resolution	156	120	96	72	48
Pixel Density (per sq m)	270400	160000	102400	57600	25600
Panel Size (mm)	400 mm W x 300 mm V x 10 mm D				
Panel Size (in)	15.75" W x 11.81" H x 0.39" D				
Panel Weight (w/ACC)	2.8kg / 6.174lb				
Brightness	500-800nits				
Average Power Consumption	250W/m ²				
MAX Power Consumption / Sq M	625W/m ²				
MAX Power Consumption / Panel	75W / panel				
Serviceability	Front				
Color Temperature	3200-9300K				
Working Voltage	100-240 Volts AC,50&60Hz				
Refresh Rate	≥1,920 Hz				
Weather Rating	IP43 Indoor				
Life to ½ Brightness	≥100,000 Hrs				

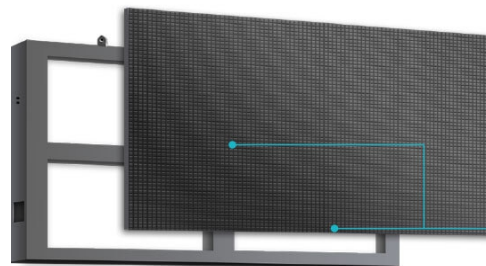

Magnet
Inside



Receiver



Power Supply



AC Power Cable



Signal Cable



DC Power Cable