

Product Information




GOLD SERIES (gold wire bonded)

4.8 & 5.9 mm SMD

Outdoor Installation High Brightness

UTOPF-0480W & UTOPF-0590W

Front Serviceable Configuration

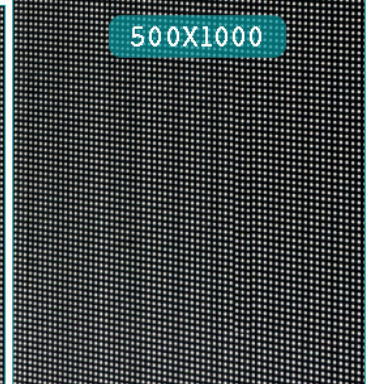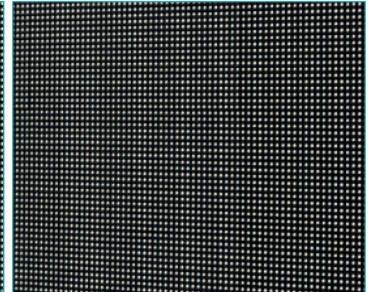

Specifications

MAY BE CUSTOM SIZED BASED UPON 250 MM X 250 MM MODULES

Display

Pixel Pitch	4.81	5.95
LED Type	SMD	
LED Configuration	3-in-1	
Brightness (Nits)	6000	6000
MODULE size (mm)	250 x 250	
Pixel Count (PER MODULE)	52 x 52	42 x 42
Pixel Density / Sq M	43624	28224
Frame Rate	60Hz	
Refresh Rate	> 1920 Hz	<i>Adjustable</i>
Driving Method	Est 1/13	
Gray Scale	14 Bit	
Horizontal Viewing Angle	140	
Vertical Viewing Angle	140	
Color Temp Range	6500K	

Chassis / Exterior

IP65 rated

Width	960 mm	37.80 in	
Height	960 mm	37.80 in	
Depth	122 mm	4.80 in	<i>ESTIMATED</i>
Weight	40 kg	89 lbs	<i>ESTIMATED</i>

Material Aluminum

Power

Input voltage	220/110	±10%	
Average Pwr	320W/sq m	20W/module	
Max Pwr	950W/sq m	60W/module	<i>(Spec)</i>
Input Current	8.1A	<i>Per 120V +/-10% (Est)</i>	